



Industrie Service

EU TYPE-EXAMINATION CERTIFICATE

According to Annex IV, Part A of 2014/33/EU Directive

Certificate No.: EU-SG 506

Certification Body of the Notified Body: TÜV SÜD Industrie Service GmbH
Westendstr. 199
80686 Munich – Germany
Identification No. 0036

Certificate Holder: Cobianchi Lifteile AG
Weststrasse 16
3672 Oberdiessbach – Switzerland

Manufacturer of the Test Sample: Cobianchi Lifteile AG
Weststrasse 16
3672 Oberdiessbach – Switzerland
(Manufacturer of Serial Production – see Enclosure)

Product: Progressive safety gear, braking device as part of the protection device against overspeed for the car moving in upwards direction

Type: PC60 _ _

Directive: 2014/33/EU

Reference Standards: EN 81-20:2014
EN 81-50:2014
EN 81-1:1998+A3:2009
EN 81-2:1998+A3:2009

Test Report: EU-SG 506 of 2016-01-27

Outcome: The safety component conforms to the essential health and safety requirements of the mentioned Directive as long as the requirements of the annex of this certificate are kept.

Date of Issue: 2016-01-27

Date of Validity: from 2016-04-20

Werner Rau
Werner Rau

Certification Body "lifts and cranes"



Annex to the EC Type-Examination Certificate No. EU-SG 506 of 2016-01-27



Industrie Service

1 Scope of application

1.1 Generally

Following application possibilities refer to a brand new pair of safety gear depending on manufacture and condition of the guide rail running surface and maximum rated and tripping speed. The safety component can fulfil separately and in combination two security features according 1.2 and 1.3.

Guide rails to be used

Minimum running surface width	32 mm
Blade width	9 – 16 mm
Blade width using exclusively according 1.2 or 1.3	7 – 30 mm

Notes:

* Mineral oils without additives (e.g. lubrication oils C according DIN 51517, part 1)

1.2 Using as a progressive safety gear (acting downwards) - permissible total mass of car and rated load depending on maximum rated and tripping speed

Manufacturing of running surface	Condition guide rail	Max. rated speed [m/s]	Max. tripping speed [m/s]	Total mass [kg] min. – max.
drawn	dry	2.80 – 3.04	3.50	800 – 6508
	oiled*	2.80 – 3.04	3.50	753 – 5941
machined	dry	2.80 – 3.04	3.50	814 – 6475
	oiled*	2.80 – 3.04	3.50	752 – 6101

1.3 Using as a braking device - part of the protection device against overspeed for the car moving in upwards direction (acting upwards) - permissible brake forces

Manufacturing of running surface	Condition guide rail	Max. rated speed [m/s]	Max. tripping speed [m/s]	Brake force [N] min. – max.
drawn	dry	2.80 – 3.04	3.50	12568 – 102151
	oiled*	2.80 – 3.04	3.50	11822 – 93256
machined	dry	2.80 – 3.04	3.50	12779 – 101629
	oiled*	2.80 – 3.04	3.50	11803 – 95766

2 Terms and Conditions

2.1 Above mentioned safety component represents only a part at the protection device against overspeed for the car moving in upwards direction. Only in combination with a detecting and triggering component in accordance with the standard (two separate components also possible), which must be subjected to an own type-examination, can the system created fulfil the requirements for a protection device.

2.2 The forces acting on the guide rails shall be safety absorbed.

2.3 Mass configuration of the lift installation with regard to the permissible total mass and braking forces to be construed in a way that comply with the valid values of deceleration according standard EN 81-20 based on safety function (max. deceleration of the empty car in up direction not more than $1g_n$).

**Annex to the EC Type-Examination Certificate
No. EU-SG 506 of 2016-01-27**



Industrie Service

- 2.4 The installer of the complete lift must create an examination instruction to fulfil the overall concept of the protection device, add it to the lift documentation and provide any necessary tools or measuring devices, which allow a safe examination (e. g. with closed landing doors).
- 2.5 The identification drawings No. 60DA-BZ01-1 and 60DO-BZ01-1 including stamp dated 2016-01-27 shall be included to the EU type-examination for the identification and information of the general construction and operation and distinctness of the approved type.
- 2.6 The EU type-examination certificate may only be used in combination with the corresponding annex and enclosure (List of authorized manufacturer of the serial production). The enclosure will be updated immediately after any change by the certification holder.

3 Remarks

- 3.1 The working direction will be marked at the blank after the type designation PC60 __ by code letters (DA, DO, UP).
- 3.2 Pursuant to the comment standard EN 81-50, the total mass determined for adjustment purposes may be 7.5 % higher or lower.
- 3.3 The progressive safety gear can also be used to a counterweight in compliance with the permissible total mass according table 1.2 of this certificate till permissible tripping speed.
- 3.4 Examination of compliance with other requirements according standard, reduction of braking forces due to wear-and-tear or alterations to the installation due to the installation's operation such as alterations to the running surfaces of the guide rails, are not part of this type-examination.
- 3.5 This EU type-examination certificate was issued according to the following standards:
 - EN 81-1:1998 + A3:2009 (D), Annex F.3 and F.7
 - EN 81-2:1998 + A3:2009 (D), Annex F.3
 - EN 81-20:2014 (D), part 5.6.2.1.1.2 and part 5.6.6.11
 - EN 81-50:2014 (D), part 5.3 and 5.7

A revision of this EU type-examination certificate is inevitable in case of changes or additions of the above mentioned standards or of changes of state of the art.

**Enclosure to the EU Type-Examination Certificate
No. EU-SG 506 of 2016-01-27**




Authorised Manufacturer of Serial Production – Production Sites (valid from: 2016-01-27):

Company Cobianchi Lifteile AG
Address Weststrasse 16
3672 Oberdiessbach – Switzerland


- END OF DOCUMENT -

Bremsfangvorrichtung Typ - PC60DA

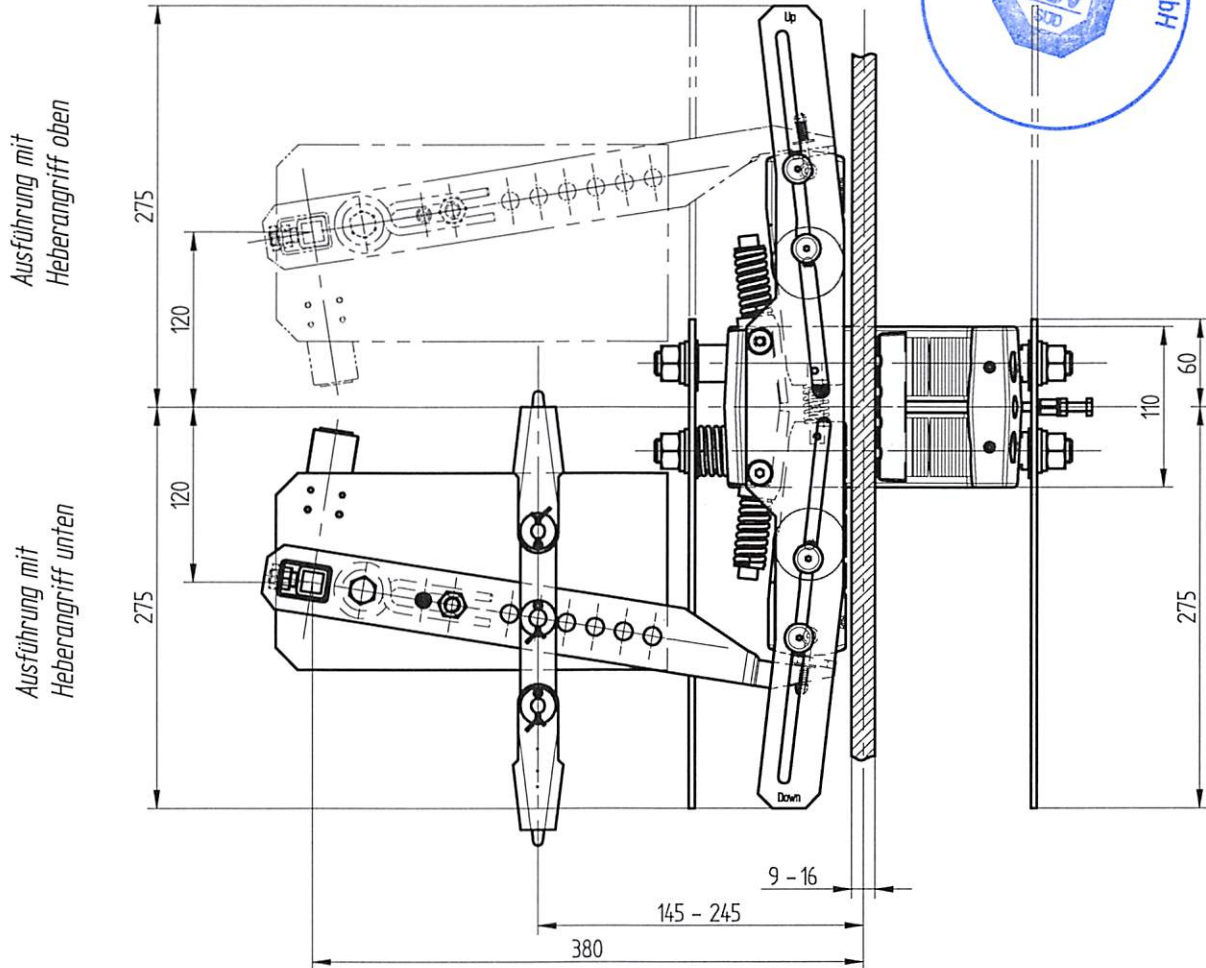

27. JAN. 2016

GEPRÜFT / APPROVED
 TÜV SÜD Industrie Service GmbH
 Prüflaboratorium für Produkte der Fördertechnik
 Westendstraße 199
 80686 München
 Sachverständige(r) / Expert

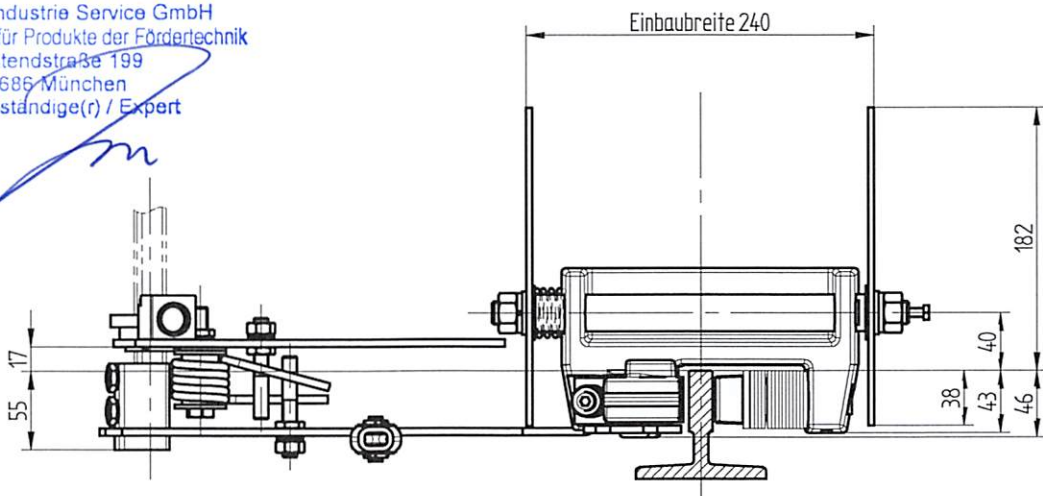

Das Urheberrecht an dieser Zeichnung und allen Beilagen, die dem Empfänger persönlich anvertraut sind, verbleibt jederzeit unserer Firma. Ohne unsere schriftliche Genehmigung darf diese nicht kopiert oder Dritten zugänglich gemacht werden.

Ausgabe:
19.01.16 / D. Helfer

COBIANCHI
 Cobiانchi Lifteile AG

Weststrasse 16, CH - 3672 Oberdiessbach
 Tel. ++41 - (0)31/720'50'50
 Fax ++41 - (0)31/720'50'51
 info@cobianchi.ch - www.cobianchi.ch

Zeichnungsnummer


60DA-BZ01-1

Bremsfangvorrichtung Typ - PC6000 / PC60UP




Ausführung mit Heberangriff oben

Ausführung mit Heberangriff unten

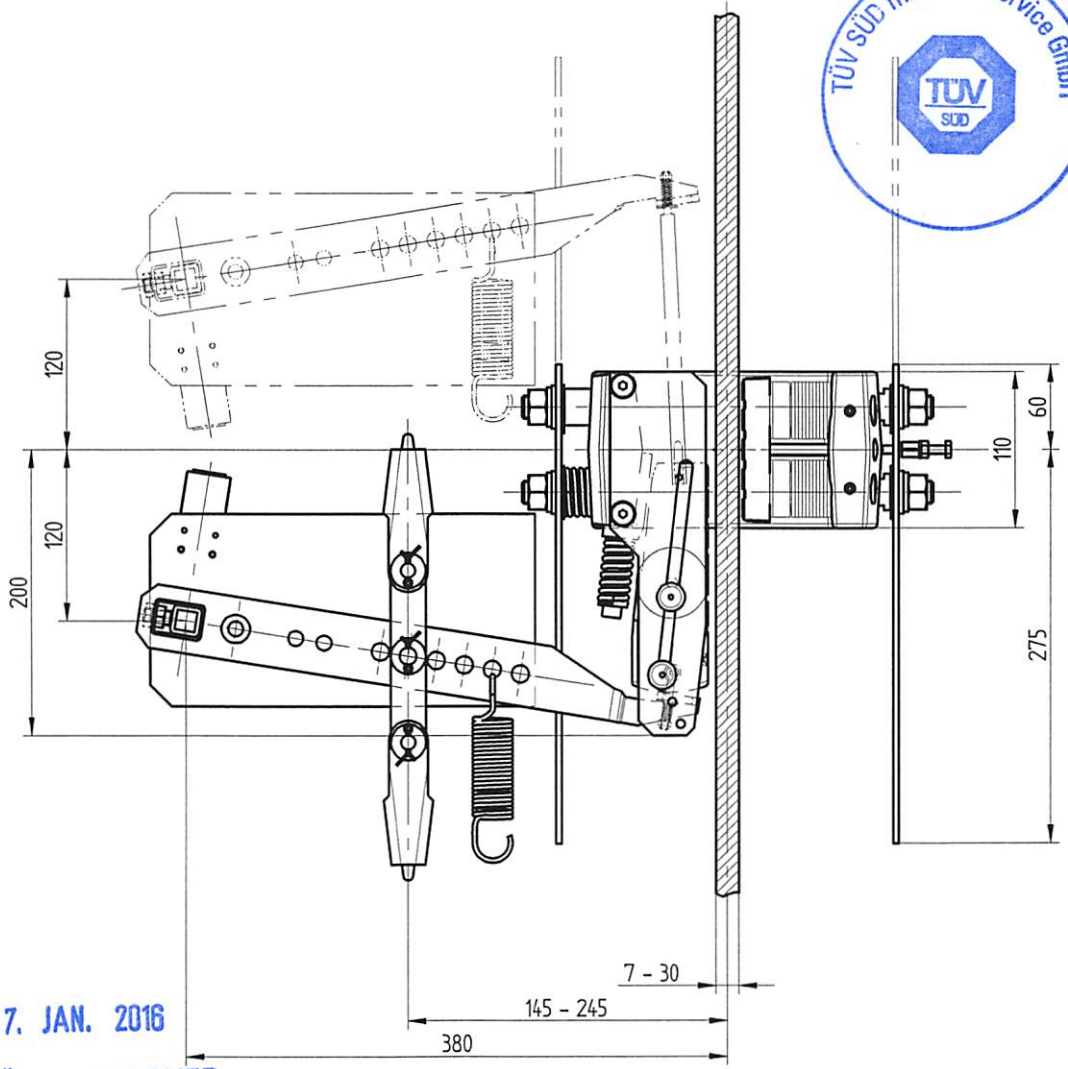

27. JAN. 2016

GEPRÜFT / APPROVED
 TÜV SÜD Industrie Service GmbH
 Prüflaboratorium für Produkte der Fördertechnik
 Westendstraße 199
 80686 München
 Sachverständige(r) / Expert

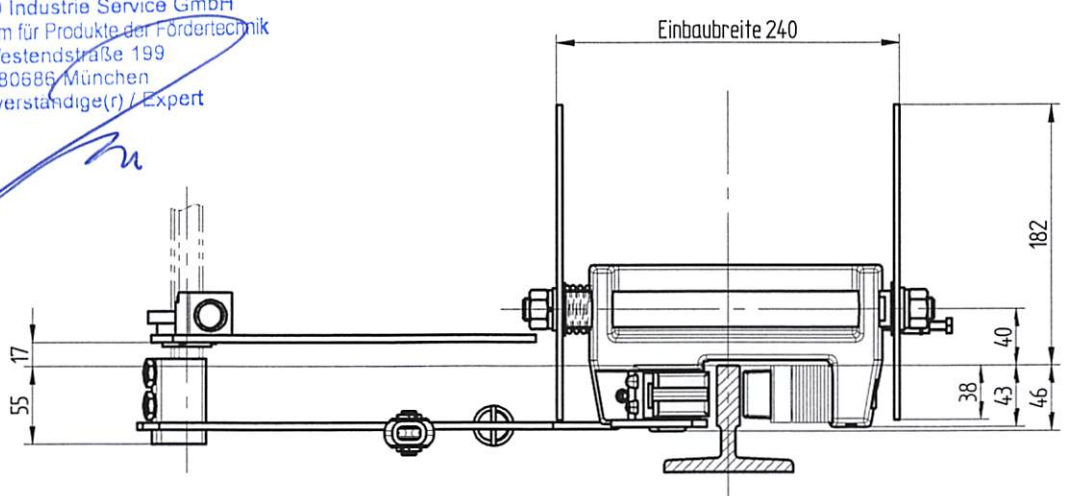

Dargestellt ist die Bremsfangvorrichtung PC6000.
 Die Bremsvorrichtung aufwärts PC60UP ist analog,
 jedoch um 180° gedreht.

Das Urheberrecht an dieser Zeichnung und allen Beilagen, die dem Empfänger persönlich anvertraut sind, verbleibt jederzeit unserer Firma. Ohne unsere schriftliche Genehmigung darf diese nicht kopiert oder Dritten zugänglich gemacht werden.

Ausgabe:
 19.01.16 / D. Helfer

COBIANCHI
 Cobiانchi Lifteile AG

Weststrasse 16, CH - 3672 Oberdiessbach
 Tel. ++41 - (0)31/720'50'50
 Fax ++41 - (0)31/720'50'51
 info@cobianchi.ch - www.cobianchi.ch

Zeichnungsnummer
 6000-BZ01-1